

SMART DESIGN LIGHTING

DESIGNED **WITH YOU**




## Company Profile


SDL Ideas is about aluminium profile lights with the latest LED technology.

This catalogue offers a wide range of products and you can also use it as a source of inspiration. If you look for a bigger or smaller lighting fixture, or a solution truly unique in shape or colour - become a member of our design team!


# Index




**Selena** - 8




**Olena** - 16




**Rina** - 26



**Yumi** - 62




**Dolly** - 64




**Trianna** - 66



**Olena Elliptic** - 36



**Ellie** - 38




**Anna O** - 40




**Sophie** - 68




**Lina** - 70




**Tilia** - 78



**Anna Inverse** - 44



**Hannah O** - 46



**Swan** - 48




**Anna Wave** - 86




**Anna Spiral** - 88



**Hannah Spiral** - 90




**Swan D** - 50




**Paula** - 52




**Chloe** - 54




**Audrey** - 92




**Amy** - 94




**Lianna** - 96



**Xara Wall** - 56



**Xara** - 58



**Xara D** - 60



**Darcy** - 102


**Products with  
acoustic panel**

104

**Mounting  
types**

106

Selena

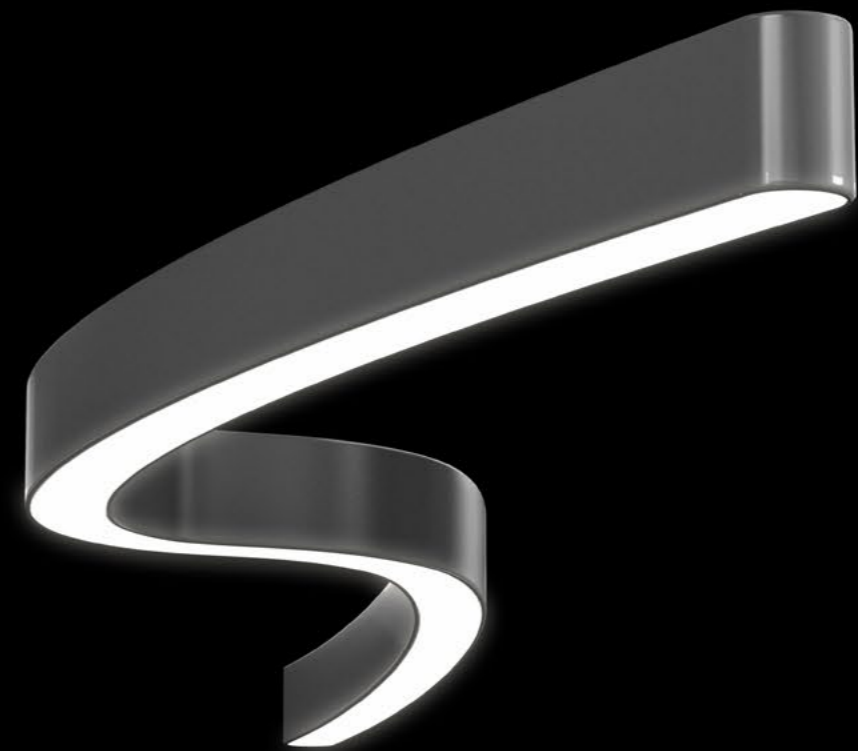









# Selena

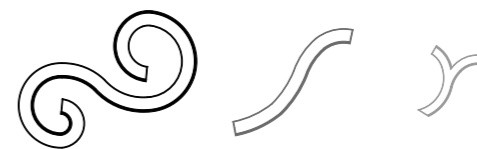


A) Profiles:

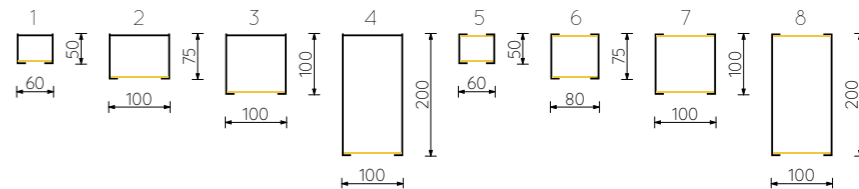

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 10.4



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL

Order code format: SE.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux
SE.	∞ W	∞ lm





Olena













# Olena

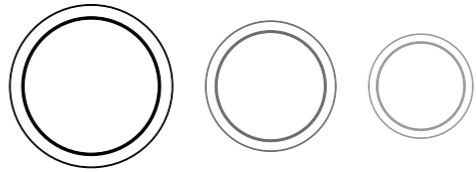


A) Profiles:

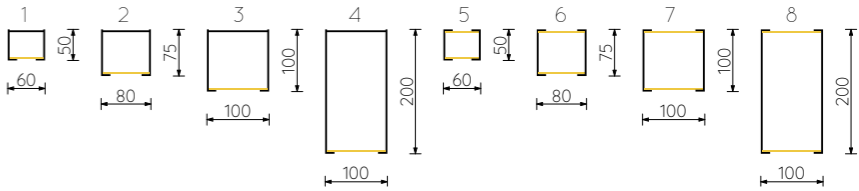

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


G) Acoustic panel: More on page 102

Order code format: OL.062.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Diameter
OL.062	39 W	3900 lm	620 mm
OL.080	52 W	5200 lm	800 mm
OL.100	65 W	6500 lm	1000 mm
OL.120	78 W	7800 lm	1200 mm
OL.200	130 W	13000 lm	2000 mm
OL.300	208 W	20800 lm	3000 mm
OL.	∞ W	∞ lm	∞ mm



Rina

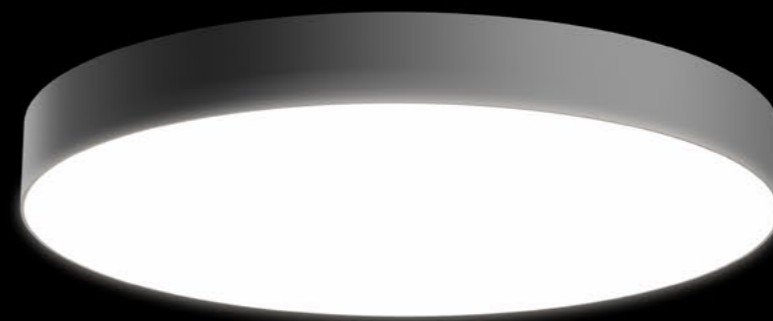













# Rina

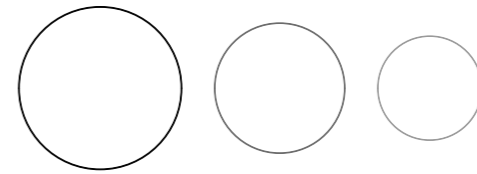


A) Profiles:

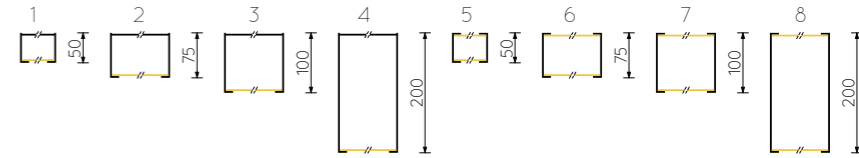

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL

G) Acoustic panel: More on page 102

Order code format: RN.030.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Diameter
RN.030	21 W	2100 lm	300 mm
RN.040	35 W	3500 lm	400 mm
RN.060	45 W	4500 lm	600 mm
RN.080	75 W	7500 lm	800 mm
RN.100	95 W	9500 lm	1000 mm
RN.120	120 W	12000 lm	1200 mm
RN.	∞ W	∞ lm	∞ mm






# Olena Elliptic



A) Profiles:

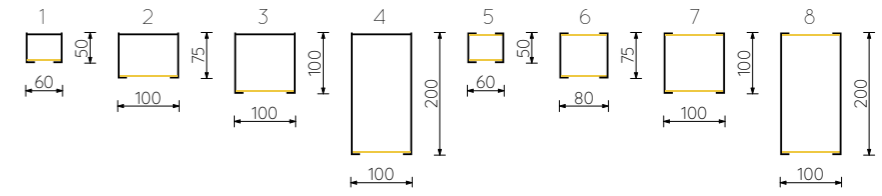

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: OE.0918.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Size
OE.0918	98 W	9800 lm	900x1800 mm
OE.1325	142 W	14200 lm	1300x2500 mm
OE.	∞ W	∞ lm	∞ mm






# Ellie




**A) Profiles:**



Profile 1 and 4 with external driver only

**B) Mounting types:** Details on page 104



**C) Color temperature:** 1) 2700K 2) 3000K 3) 4000K 4) TW

**D) Driver type:** 1) On-off 2) DALI 3) Bluetooth

**E) Covers:** 1) Opal 2) Microprismatic

**F) Color:** 1) Black 2) White 3) Grey xxxx) or color by RAL

**G) Acoustic panel:** More on page 102


Order code format: EL.0714.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Size
EL.0714	100 W	1000 lm	700x1400 mm
EL.	∞ W	∞ lm	∞ mm






# Anna O

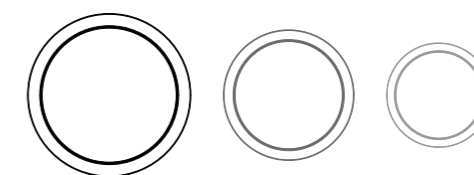

A) Profiles:



With external driver only

B) Mounting types:



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


G) Acoustic panel: More on page 102

Order code format: AO.060.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Diameter
AO.060	40 W	3200 lm	600 mm
AO.080	55 W	4019 lm	800 mm
AO.100	65 W	5024 lm	1000 mm
AO.120	75 W	6028 lm	1200 mm
AO.180	125 W	9824 lm	1800 mm
AO.	∞ W	∞ lm	∞ mm



# Anna Inverse

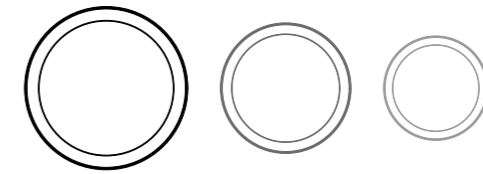

A) Profiles:



With external driver only

B) Mounting types:



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


G) Acoustic panel: More on page 102

Order code format: AN.060.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Diameter
AN.060	40 W	3200 lm	600 mm
AN.080	55 W	4019 lm	800 mm
AN.100	65 W	5024 lm	1000 mm
AN.120	75 W	6028 lm	1200 mm
AN.180	125 W	9824 lm	1800 mm
AN.	∞ W	∞ lm	∞ mm



# Hannah ○

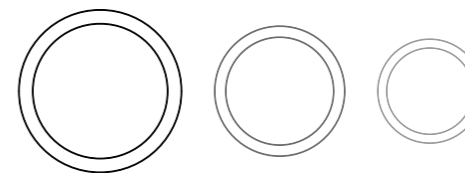

A) Profiles:



B) Mounting types: Details on page 104



- C) Color temperature: 1) 2700K 2) 3000K 3) 4000K
  - D) Driver type: 1) On-off 2) DALI 3) Bluetooth
  - E) Covers: 1) Opal
  - F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL
  - G) Acoustic panel: More on page 102
- Order code format: HN.060.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Length
HN.060	80 W	6400 lm	600 mm
HN.080	110 W	8800 lm	800 mm
HN.100	130 W	10400 lm	1000 mm
HN.120	150 W	12000 lm	1200 mm
HN.180	250 W	20000 lm	1800 mm
OE.	∞ W	∞ lm	∞ mm







A) Profiles:

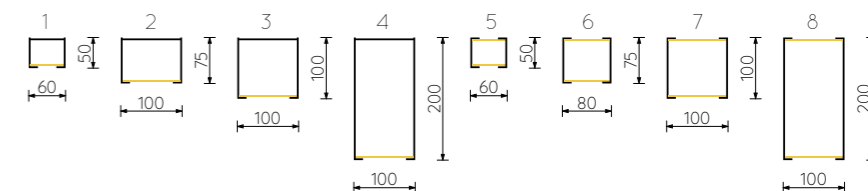

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: SW.060.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Side Length
SW.060	35 W	3000 lm	600 mm
SW.120	70 W	7000 lm	1200 mm
SW.	∞ W	∞ lm	∞ mm






# Swan D




A) Profiles:



Profile 1 and 4 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic


F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: SD.060.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Side Length
SD.060	45 W	4500 lm	600 mm
SD.120	100 W	10000 lm	1200 mm
SD.	∞ W	∞ lm	∞ mm



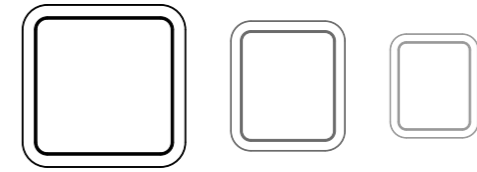

A) Profiles:

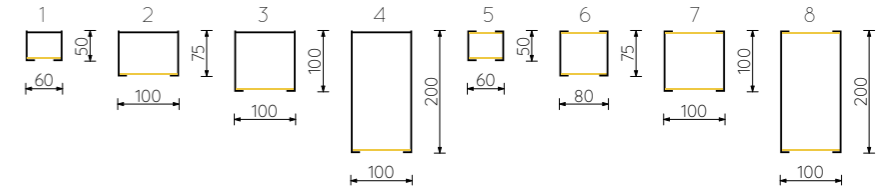

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL


G) Acoustic panel: More on page 102

Order code format: PA.0606.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Size
PA.0606	49 W	4900 lm	600x600 mm
PA.1212	98 W	9800 lm	1200x1200 mm
PA.	∞ W	∞ lm	∞ mm



# Chloe

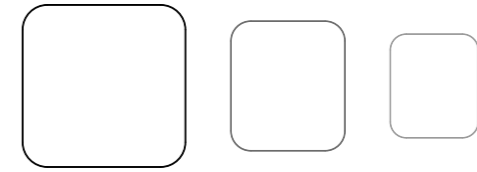


## A) Profiles:



Profile 1 and 4 with external driver only

## B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: CH.0606.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Size
CH.0606	45 W	4500 lm	600x600 mm
CH.0312	45 W	4500 lm	300x1200 mm
CH.	∞ W	∞ lm	∞ mm






# Xara Wall

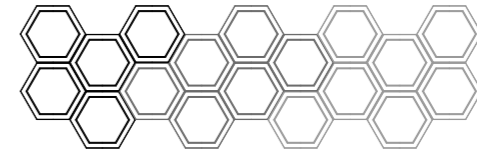

A) Profiles:



With external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal


F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: XW.225.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Outer Diameter
XW.225	10 W	800 lm	450 mm
XW.	∞ W	∞ lm	∞ mm



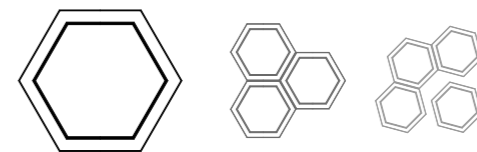

A) Profiles:

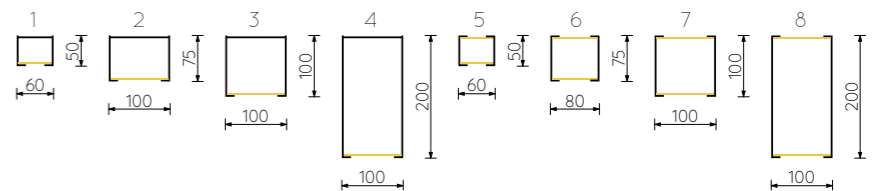

Profile 1 and 5 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL


G) Acoustic panel: More on page 102

Order code format: XA.120.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Outer Diameter
XA.120	72 W	7200 lm	1200 mm
XA.240	144 W	14400 lm	2400 mm
XA.	∞ W	∞ lm	∞ mm



# Xara D

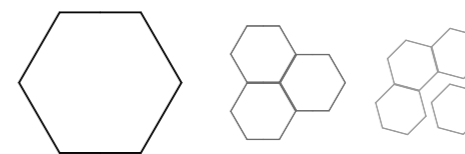

A) Profiles:



Profile 1 and 4 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic


F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL

G) Acoustic panel: More on page 102


Order code format: XD.120.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Outer Diameter
XD.120	65 W	6500 lm	1200 mm
XD.	∞ W	∞ lm	∞ mm



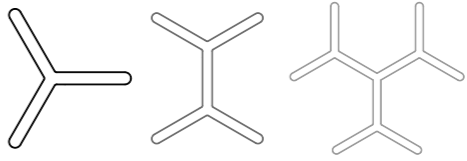


A) Profiles:



Profile 1 and 4 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

Order code format: YU.120.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Outer Diameter
YU.120	42 W	4200 lm	1200 mm
YU.240	84 W	8400 lm	2400 mm
YU.	∞ W	∞ lm	∞ mm








# Dolly

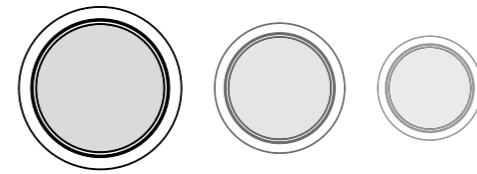


A) Profiles:



Profile 1 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


Order code format: DO.060.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Diameter
DO.060	60 W	6000 lm	600/400 mm
DO.080	97 W	9700 lm	800/600 mm
DO.120	173 W	17300 lm	1200/1000 mm
DO.	∞ W	∞ lm	∞ mm





# Trianna



A) Profiles:



With external driver only

B) Mounting types: Details on page 104



- C) Color temperature: 1) 2700K 2) 3000K 3) 4000K
- D) Driver type: 1) On-off 2) DALI 3) Bluetooth
- E) Covers: 1) Opal
- F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

Order code format: TR.200.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Size
TR.200	50+18 W	5500 lm	720x900 mm
TR.300	80+18 W	8500 lm	1100x990 mm
TR.400	110+18 W	11500 lm	2200x700 mm
TR.	∞ W	∞ lm	∞ mm





A) Profiles:



With external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal


F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

Order code format: SO.100.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Size
SO.100	50+18 W	5500 lm	640x1158 mm
SO.200	80+18 W	8500 lm	1399x732 mm
SO.300	110+18 W	11500 lm	1451x805 mm
SO.	∞ W	∞ lm	∞ mm




Lina

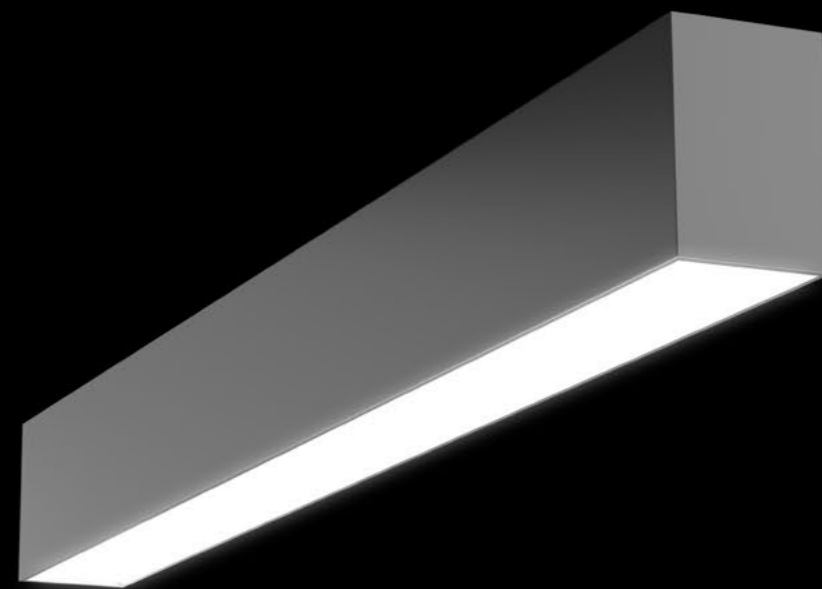







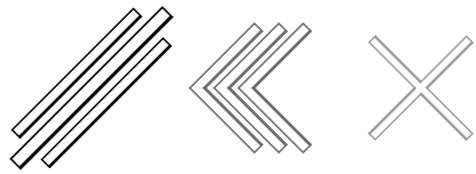

A) Profiles:



B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

G) Acoustic panel: More on page 102

Order code format: LN.113.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Length
LN.113	36 W	3600 lm	1130 mm
LN.142	45 W	4500 lm	1420 mm
LN.	∞ W	∞ lm	∞ mm




Tilia











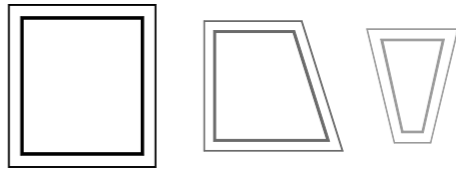

A) Profiles:



B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

G) Acoustic panel: More on page 102

Order code format: TL.0606.A1.B3.C4.D3.E2:F1035


Code	Power	Light Flux	Size
TL.0606	50 W	5000 lm	600x600 mm
TL.0612	100 W	10000 lm	600x1200 mm
TL.	∞ W	∞ lm	∞ mm



# Anna Wave



A) Profiles:



Profile 1, 2 and 3 with external driver only

B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

Order code format: AW:100.A1.B3.C4.D3.E1:F1035


Code	Power	Light Flux	Length
AW:100 AW.	30 W ∞ W	2800 lm ∞ lm	1000 mm ∞ mm



# Anna Spiral




A) Profiles:



Profile 1, 2 and 3 with external driver only

B) Mounting types: Details on page 104



- C) Color temperature: 1) 2700K 2) 3000K 3) 4000K
- D) Driver type: 1) On-off 2) DALI 3) Bluetooth
- E) Covers: 1) Opal
- F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL

Order code format: AS.200.A1.B3.C4.D3.E1:F1035

Code	Power	Light Flux	Length
AS.200	68 W	6120 lm	2000 mm
AS.	∞ W	∞ lm	∞ mm






# Hannah Spiral




A) Profiles:



Profile 1, 2 and 3 with external driver only

B) Mounting types: Details on page 10.4



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


Order code format: HS.200.A1.B3.C4.D3.E1:F1035

Code	Power	Light Flux	Length
HS.200	136 W	12240 lm	2000 mm
HS.	∞ W	∞ lm	∞ mm







# Audrey

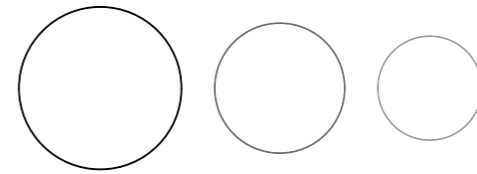

A) Profiles:



B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth


E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL


Order code format: AU.030.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Diameter
AU.030	21 W	2100 lm	300 mm
AU.040	35 W	3500 lm	400 mm
AU.060	45 W	4500 lm	600 mm
AU.080	75 W	7500 lm	800 mm
AU.100	95 W	9500 lm	1000 mm
AU.120	120 W	12000 lm	1200 mm
AU.	∞ W	∞ lm	∞ mm




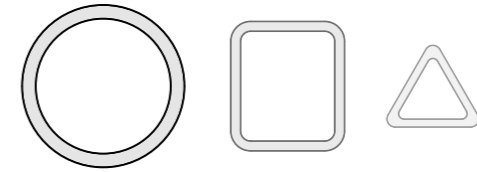

A) Profiles:



B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth

E) Covers: 1) Opal 2) Microprismatic

F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


Order code format: AM.062.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Diameter
AM.062	39 W	3900 lm	620 mm
AM.080	52 W	5200 lm	800 mm
AM.100	65 W	6500 lm	1000 mm
AM.120	78 W	7800 lm	1200 mm
AM.200	130 W	13000 lm	2000 mm
AM.300	208 W	20800 lm	3000 mm
AM.	∞ W	∞ lm	∞ mm






Lianna

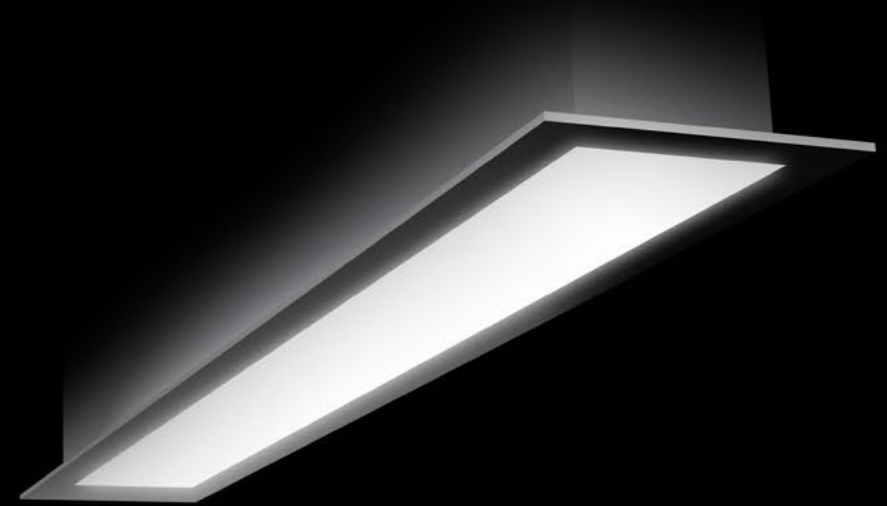







# Lianna

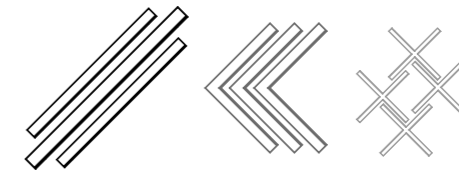

A) Profiles:



B) Mounting types: Details on page 104



C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW

D) Driver type: 1) On-off 2) DALI 3) Bluetooth


E) Covers: 1) Opal

F) Color: 1) Black 2) White 3) Grey xxx) or color by RAL


Order code format: LA.116.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux	Length
LA.116	36 W	3600 lm	1160 mm
LA.	∞ W	∞ lm	∞ mm




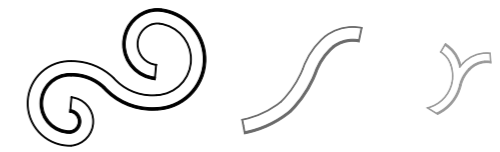

A) Profiles:



B) Mounting types: Details on page 104



- C) Color temperature: 1) 2700K 2) 3000K 3) 4000K 4) TW
- D) Driver type: 1) On-off 2) DALI 3) Bluetooth
- E) Covers: 1) Opal 2) Microprismatic
- F) Color: 1) Black 2) White 3) Grey xxxx) or color by RAL


Order code format: DA.A1.B3.C4.D3.E2:F1035

Code	Power	Light Flux
DA.	∞ W	∞ lm




# Acoustic panel forms and colors












Plain colors: 6mm and 12mm thickness | Colorful textiles: 7mm and 13mm thickness

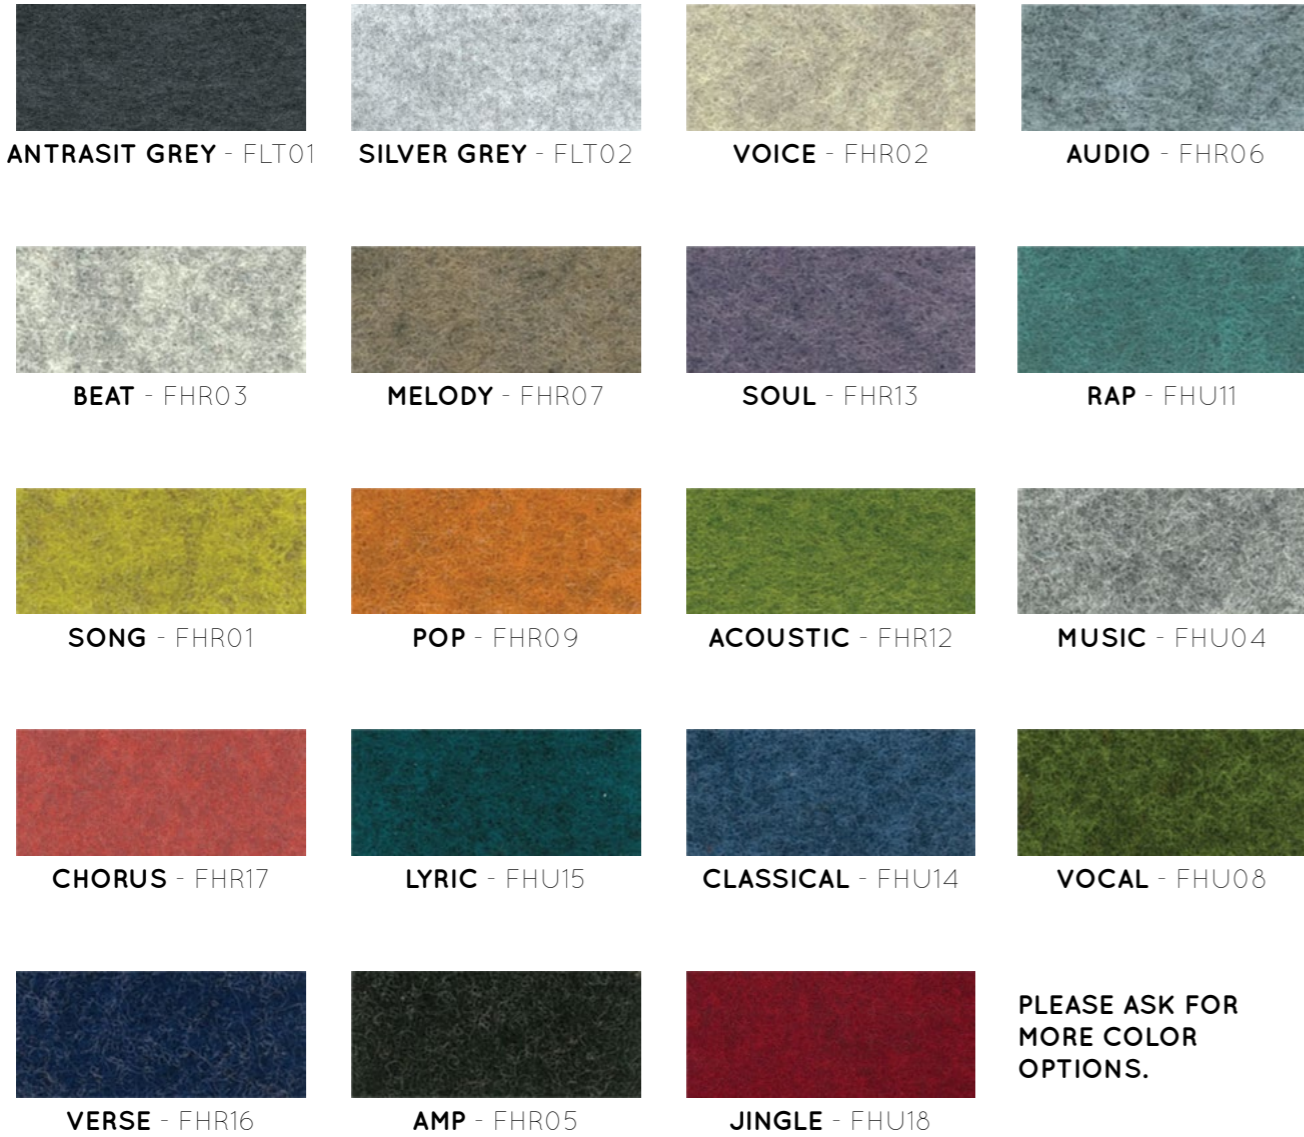

PLEASE ASK FOR MORE COLOR OPTIONS.

# Products available with acoustic panel

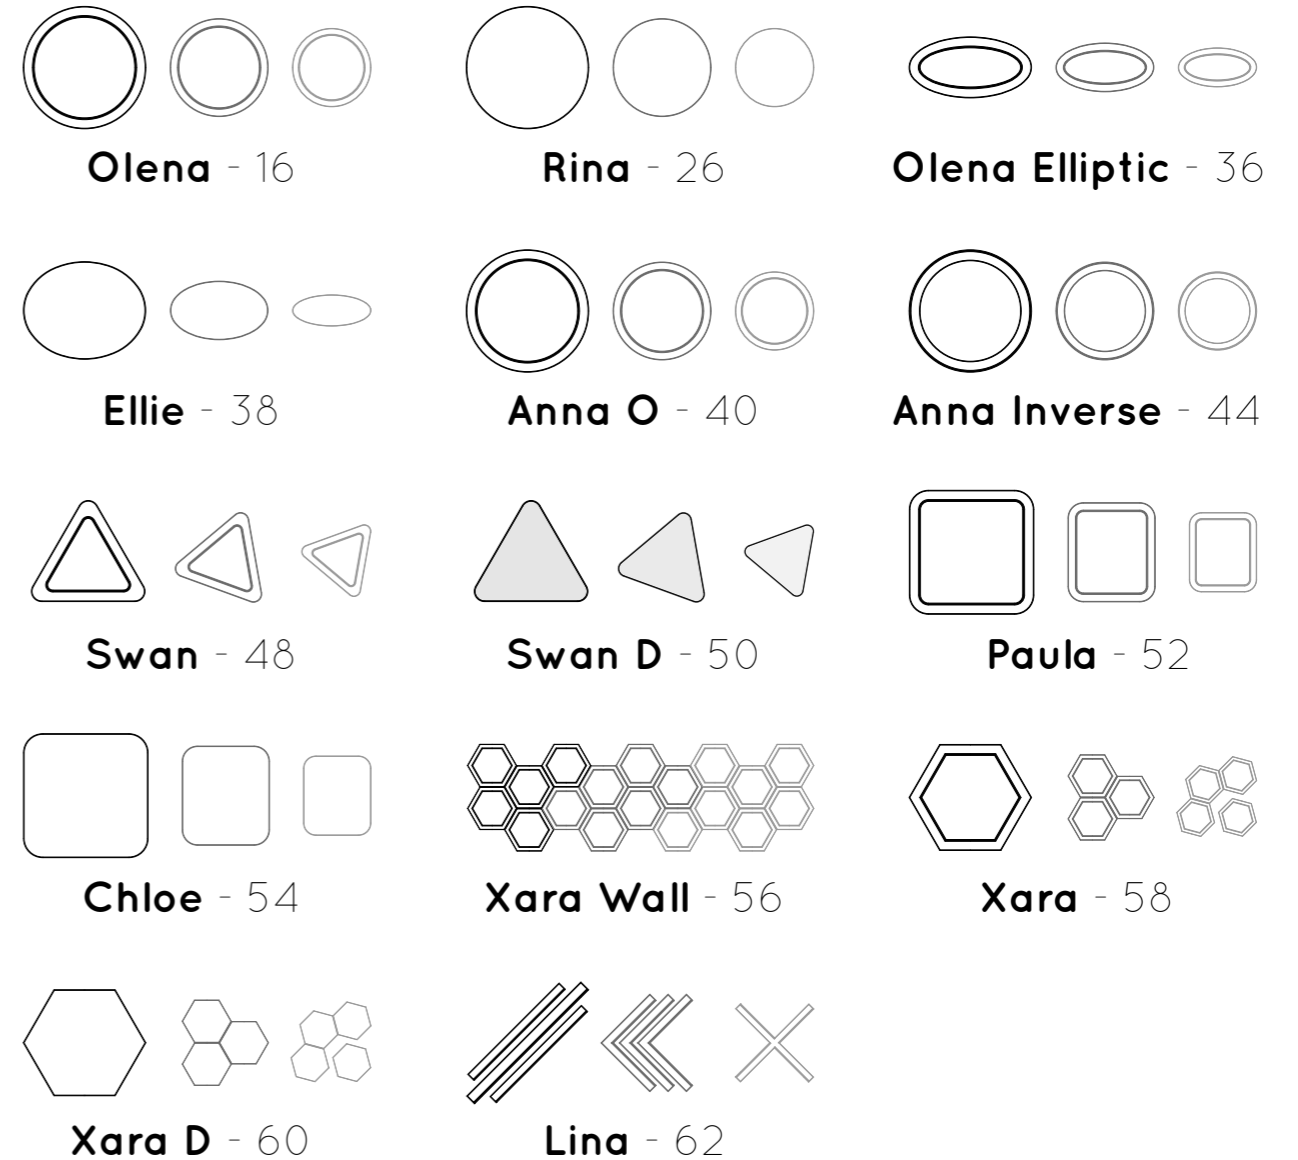

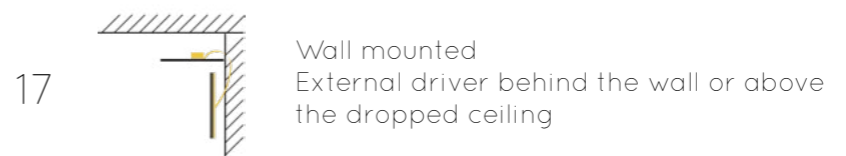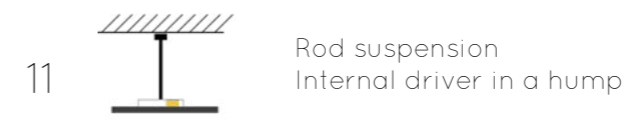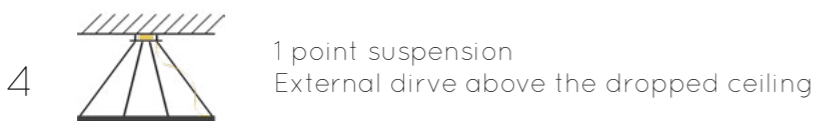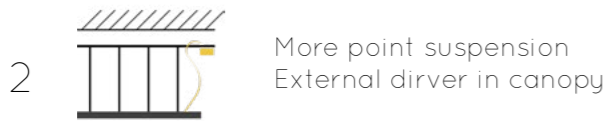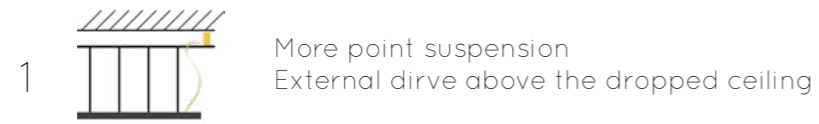



# İletişim

## Üretim & Showroom

FerhatPaşa Mah. , 27. Sk. No:7A, 34888 Ataşehir/İstanbul

### Telefon

0542 245 27 61

### E-Mail

[info@sdlaydinlatma.com](mailto:info@sdlaydinlatma.com)

[www.sdlaydinlatma.com](http://www.sdlaydinlatma.com)